OneSmart[®]

Tuya Zigbee curtain motor


INSTRUCTIONS



- ABSORBED . INNOVATE . THE ACME ---

According to the company's business development, the product may be adjusted from time to time, and the specific functions and contents may be adjusted dynamically. The company cannot guarantee that the relevant packaging and instructions updated in time. Customersplease use in practical. The functions and contents shall prevail.

Structural description

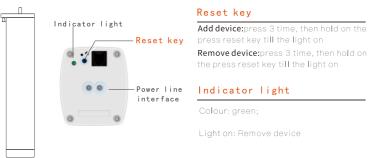

Basic parameters

Intelligent curtain motor

Product model	ONE-M118	Radio frequency	2.4G/433MHz	Maximum width	12m
Rated power	50W	Maximum payload	55KG	Protection grade	20IP
Rated current	0.14A	Fuselage weight	1.05KG	Running time	>4min
Rated torque	2Nm	Operation noise	33dB	Working temperature	-10℃~50℃
Running speed	14cm/s	Minimum width	0.9M	Power line type	2 core
Working voltage	100~240Vac 50/60Hz				

Functional characteristics

- Touch start function
- Power failure pull function
- Resistance And Stop Function
- Run gracefully
- Fabric rebound correction function Calibration function
- Stroke fine tuning function
- Electronic memory limit

Check whether the pull-out lock rod is in the schematic position. If on the right side of the diagram, pull the pull-out lock rod while pulling it to the left.

Motor installation

Motor disassembly

Pull down the locking

rod downward to make

the top slide out of the

Remote control pair code

A road forward key B road forward key

A road close key x x + B road close key

A road stop key ____ II ___ B road stop key

limit hole.









Press the motor reset

key for 3 seconds until

the indicator light is long.

Motor and remote control counter code







opened, and the code

 $\left[\times \right]$

或〈〉



The product uses graffiti intelligent system

control, please download graffiti smart APP.

Add subdevice

gateway press [Add

Subdevice] to add device.

正在连接

Press the three reset button continuously, then press the green indicator to flash.



Electric motor networking







status according to the page instructions,



Select "curtains", confirm the device click confirmation to enter the network.

接着电源,确认指示灯在快闪

添加设备 兼容模式

Enter the password, click confirm, Waiting for the connection to be successful, you can control it on APP and customize the setting name

The way to solve the net problem is

There are two ways to solve the intelligent switch network:

Method 1: on mobile APP, remove the device to be removed, click the upper right corner. <a>Z ,Select "remove equipment";

Method 2: Release the curtain motor, press the reset key of the motor three times in a row, and then press it for a long time until flash, then the equipment will be relieved.

Device sharing:

Enter the device on graffiti APP and click on the top right side. Z Select "share device", then "add share", add the account you want to add to it.

Speech control method

Example 1: Tmall elf control

Graffiti intelligent curtain motor supports a variety of voice box control:Tmall elves Little love classmate takki | Amazon | Google Home

- 1. intelligent curtain motor through "graffiti intelligence" APP networking.
- 2. bind the account of graffiti intelligence to the APP of each voice box, that is, the corresponding voice control.

2. open the Tmall elf APP. Click on my "add device" to bind the platform account. Find

"graffiti intelligence" to bind. After binding, you can control Tmall elf.

1. intelligent curtain motor through "graffiti intelligence" APP networking.

2. open "Mi Jia" APP. Click on "mine"—— "Set up"——"Laboratory function"

— "Third party platform" — Add "find" graffiti intelligence "to bind.

For example, 2: little love classmates control.

After binding, you can control your classmates.

Inventory

2. power cord.

3. a user manual.

1. intelligent curtain motor;

- center will confirm that it can enjoy free return or exchange services. 2. Within 8-15 days from the date of your signature, if there is a performance failure of this product, the service center 1. intelligent curtain motor through "graffiti intelligence" APP networking. will determine that it can enjoy free exchange or maintenance services.
 - 3. Within 36 months from the date of your signing and receiving, the product has performance failures, which can be

1. Within 7 days from the date of your signature and receipt, if there is a performance failure of this product, the service

"device name"

- Pause in curtain opening

or closing process

Curtain motor can be

Click to enter positive

controlled closed.

inversion settings.

and so on.

repaired free of charge by the service center.

Quality assurance performance failure

Interface description

It can slide and adjust the

curtain to open or close 100%.

Return key____

Curtain motor can be -

controlled to open.

Click to enter setup timer.

Three package provisions

After sale policy

- 1. the product is not energized, or the power fails to start properly.
- 2. the key of the device can not be used normally.
- 3. the function of other products caused by other hardware failures can not be used normally.

Non warranty range

- 1. Unauthorized maintenance, misuse, collision, abuse, infusion, accident, alteration, incorrect use of non-product accessories, or tear, alter labels, anti-counterfeiting marks;
- 2. more than three packages are valid.
- 3. the damage caused by force majeure, such as fire, flood and lightning strikes, is not in line with the situation of failure.4. failure of the product and accessories due to human causes.

Commitment and statement

The company guarantees that the products conformto the national standards. The company will not undertake any obligations forany declarations related to products that are not directly issued by thecompany.

- Remote control Timing control
- Speech control
- Positive inversion settings

The motor is inserted into the main transmission

Pull and pull the lock

bar to the left side.

Be careful







Remove the motor.

Install according to the size requirements in the illustration.

Ensure the position of the pullout lock rod in the illustration.


■ The ceiling of the motor must be strong enough to withstand


B path setting key — A path setting key

all the weight including the guide rail, motor and curtain cloth.

Motor and remote control decoding








the reset key of the motor for 5 seconds, the indicator lights flicker 5 times, and the decoding is successful.

Commutation of motor operation





3 seconds until the

indicator light is on.



The front side of the









www.OneSmartShop.com